

## LEONI – Long-term manufacturing expertise and **global** market coverage

The technological advancement of charging standards allows the charging process to be shortened to just a few minutes. LEONI supports you in your projects with global plants and in-depth expertise in the field of DC charging cables. Decide for yourself whether you choose a cable from our portfolio with existing international approvals or a charging cable customised exactly to your requirements.



## International standards and approvals

**Global:** IEC 62893 Series

**Europe:** EN 50620

**NAFTA:** UL 2263


**China:** GB/T 33594

**Japan:** JCS 4522



LEONI KABEL GMBH  
Division Automotive Cable Solutions

An der Lände 3  
91154 Roth  
Germany  
Telefon +49 9171 804-0  
E-Mail EVC@leoni.com  
www.leoni-automotive-cables.com

 @LEONI Automotive Cable Solutions

# LEONI

## Charging cables for electric vehicles

**DC Charging** - For public charging  
and fast charging








**LEONI – Your global partner  
for local solutions**






**DC cables for NACS  
Connector applications**

In addition to an extensive AC portfolio, LEONI offers attractive DC cables for NACS connector applications. The portfolio includes cables with reduced wall thickness, highly flexible insulation materials and customised performance classes.

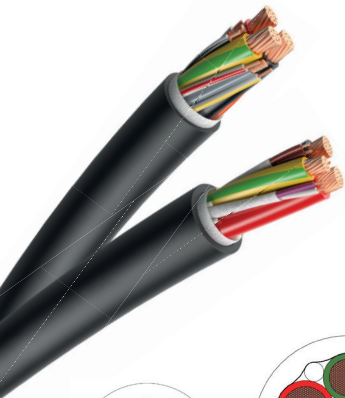

**Uncooled cables for  
CCS Combo applications**

The CCS Combo portfolio covers cables up to 375 / 400 A. Approved types in accordance with IEC and UL offer the immediate use in your application. We conjointly design the cables according to customer-specific requirements. Our international team of experts will be happy to advise you.



**Cooled cables for  
high power classes and  
Megawatt Charging System**

The technological development of a cooling component in the charging cable increases the transferable power with consistently excellent handling for the end customer. Our cooled cables are available from 500 to 3,000 A charging current. The LEONI portfolio is optionally available with indirect cooling for water-glycol coolant or direct cooling for various non-conductive coolants. LEONI also tests its cables beyond the normative requirements for maximum safety and service life in demanding environment.

